

COMMSCOPE Copper CL Cable Series


CL 1.7/7.0	
Center conductor Ø	1,70 mm
Dielectric Ø	7,00 mm
Outer conductor Ø	7,50 mm
Jacket Ø	10,40 mm
Velocity of propagation	0,88
Frequency (MHz)	dB/100 m
5	0,81
200	5,30
470	8,27
600	9,4
750	10,58
1000	12,33
2000	18,23
CL 2.1/8.8	
Center conductor Ø	2,10 mm
Dielectric Ø	8,80 mm
Outer conductor Ø	9,30 mm
Jacket Ø	12,40 mm
Velocity of propagation	0,88
Frequency (MHz)	dB/100 m
5	0,61
200	4,24
470	6,66
600	7,49
750	8,56
1000	10,01
2000	15,03
CL 3.3/13.5	
Center conductor Ø	3,30 mm
Dielectric Ø	13,55 mm
Outer conductor Ø	14,05 mm
Jacket Ø	17,70 mm
Velocity of propagation	0,88
Frequency (MHz)	dB/100 m
5	0,41
200	2,79
470	4,41
600	5,02
750	5,65
1000	6,60
2000	9,96

Innenleiter /
Center conductor

Dielektrikum /
Dielectric

**Geschweißtes
Kupferrohr /**
Smooth welded
copper tape

**Polyethylen-
Mantel /**
Polyethylene jacket

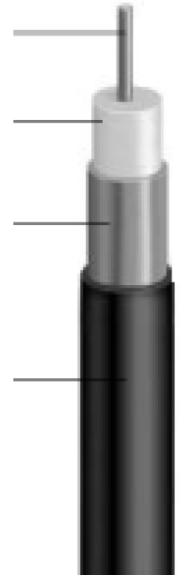

CL 4.75/19.4	
Center conductor Ø	4,75 mm
Dielectric Ø	19,40 mm
Outer conductor Ø	20,00 mm
Jacket Ø	24,90 mm
Velocity of propagation	0,88
Frequency (MHz)	dB/100 m
5	-
200	-
470	-
600	-
750	-
1000	-
2000	-