


HUAWEI MA5800

OPTICAL LINE TERMINAL

Das MA5800 wurde entwickelt um Netze mit größeren Bandbreiten, höheren Geschwindigkeiten und intelligenterer Verbindungsfähigkeit errichten zu können.

Durch die Bereitstellung von GPON, 10G GPON (inklusive XG-PON und XGS-PON), P2P GE und 10GE Zugang unterstützt das MA5800 die Entwicklung von FTTH, FTTD, FTTB, FTTC und D-CCAP Netzen. Es findet daher für Home Access, Enterprise Access, Mobile Backhaul und WiFi-Hotspot Backhaul Szenarios Verwendung und verbindet alle Services in einem Glasfasernetz.

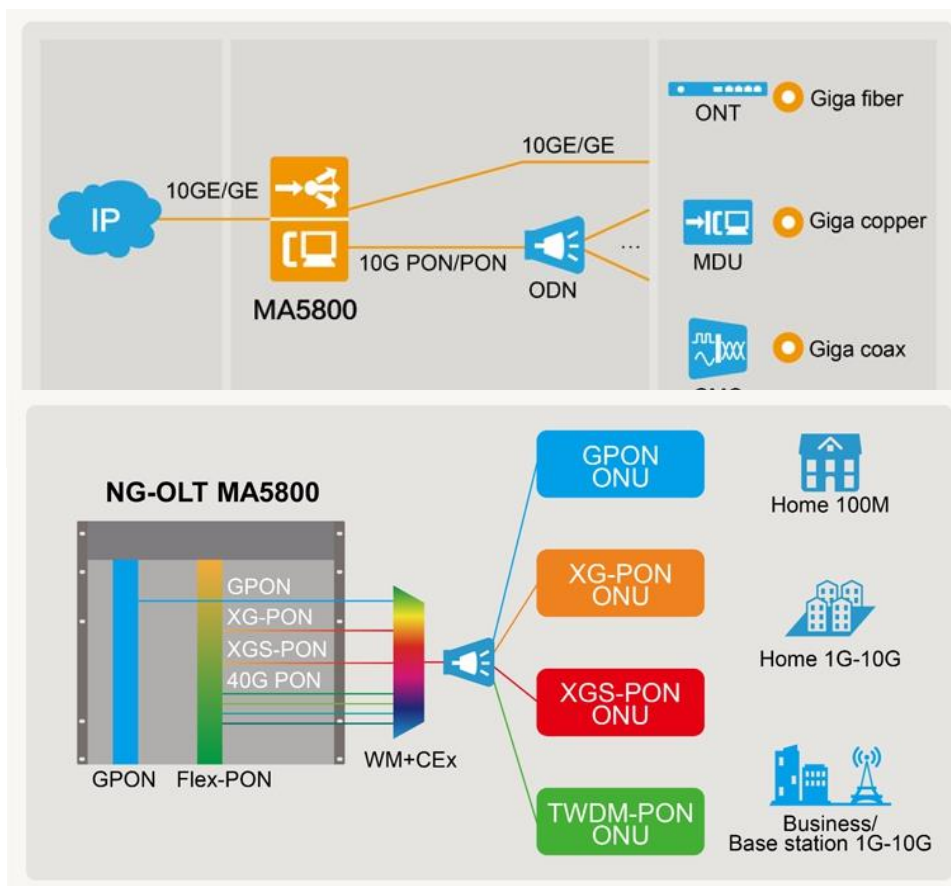


Das MA5800 gibt es in 4 Rackausführungen. Der einzige Unterschied zwischen diesen Bauarten besteht in der Anzahl der Service-Slots (sie haben dieselben Funktionen).

MA5800-X17 (GROSSE KAPAZITÄT, ETSI)

(V100R018C00 und spätere Versionen)


MA5800-X17 unterstützt 17 Service-Slots mit Backplane H901BPLB und H901BPLD.

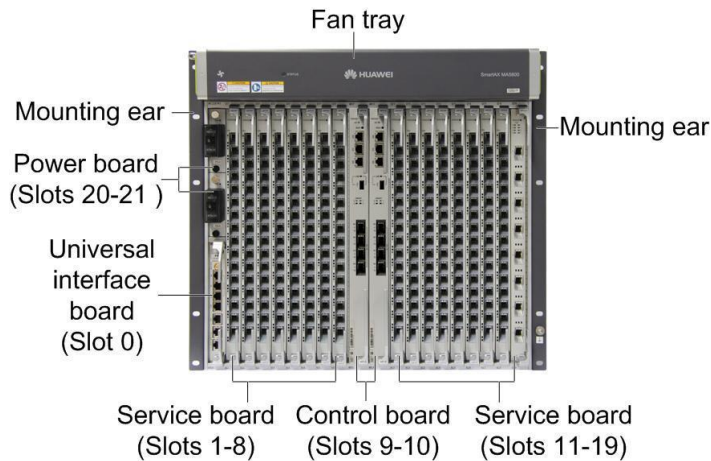

MA5800-X15 (GROSSE KAPAZITÄT, IEC)

(V100R016C10 und spätere Versionen)


MA5800-X15 unterstützt 15 Service-Slots mit Backplane H901BPIB.

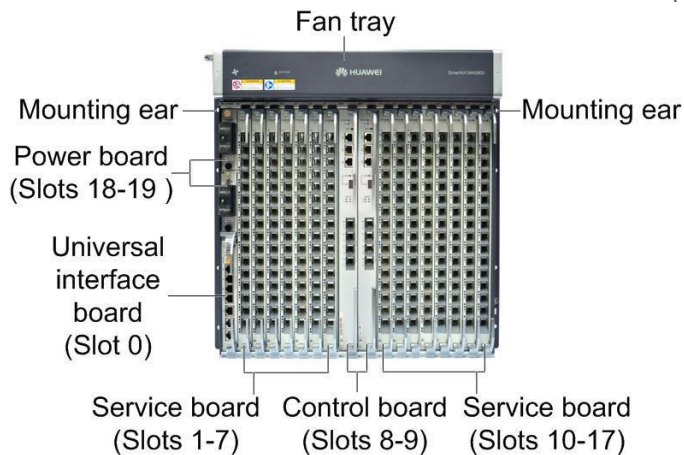

MA5800-X7 (MITTLERE KAPAZITÄT)

(V100R016C00 und spätere Versionen)


MA5800-X7 unterstützt 7 Service-Slots mit Backplane H901BPMB.

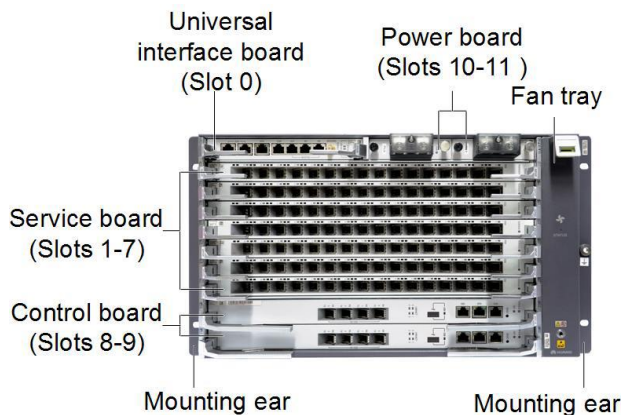

MA5800-X2 (KLEINE KAPAZITÄT)

(V100R017C10 und spätere Versionen)

MA5800-X2 unterstützt 2 Service-Slots mit Backplane H901BPSB

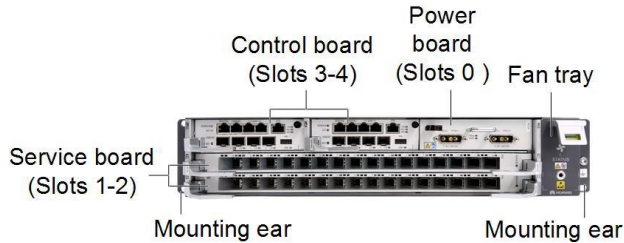

PHYSIKALISCHE SPEZIFIKATIONEN

	MA5800-X17	MA5800-X15	MA5800-X7	MA5800-X2
Supported cabinet	N63E-22	N66E-22	N63E-22 and N66E-22	N63E-22
Maximum weight (including mounting brackets)	45 kg	35 kg	26 kg	9.4 kg
Maximum input current	60 A	60 A	40 A	DC power supply: 20 A AC power supply: 8 A
Power supply mode	DC power support (dual for backup)			DC power support (dual for backup) AC power supply + battery for backup
Working voltage range	-38.4 V DC to -72 V DC			DC power supply: -38.4 V to -72 V AC power supply: 100 V to 240 V
Rated voltage	-48V/-60V			DC power supply: -48 V/-60 V AC power supply: 110 V/220 V
PHYSICAL SPECIFICATIONS				
Ambient temperature	-40°C to +65°C* The MA5800 can start up at a lowest temperature of -25°C . *The +65°C temperature refers to the highest temperature measured at the air intake vent.			
Ambient humidity	5% RH to 95% RH			
Atmospheric pressure	70 kPa to 106 kPa			
Altitude	< 4000m** **The air density varies with the altitude and will affect the heat dissipation of a device. Therefore, the working environment temperature of the MA5800 varies with the altitude.			

MAXIMALE PORTANZAHL PRO SUBRACK

	MA5800-X17	MA5800-X15	MA5800-X7	MA5800-X2
GPON ports	272	240	112	32
XG-PON ports	272	240	112	32
XGS-PON ports	272	240	112	32
GE/FE ports	816	720	336	96
10GE ports	408	360	168	16
E1 ports	544	480	224	64

SYSTEM SPEZIFIKATIONEN

	MA5800-X17	MA5800-X15	MA5800-X7	MA5800-X2
Switching capacity of the control board (load sharing mode)	• MPLA: 3.6 Tbit/s • MPLB: 7 Tbit/s			MPSC: 480 Gbit/s
Maximum bandwidth per service slot (load sharing mode)	• MPLA: 100 Gbit/s • MPLB: 200 Gbit/s			MPSC: 80 Gbit/s
System Layer 2 packet forwarding rate (load sharing mode)	• MPLA: 5298 Mpps • MPLB: 10357 Mpps			MPSC: 714 Mpps
Maximum number of concurrent 4K video users	16000		8000	2000
Maximum number of MAC address	262143			
Maximum number of IPv4 routing tables	65536			
Maximum number of IPv6 routing tables	16384			
Maximum number of ARP tables	• Before the V100R017C10 version: 66048 • V100R017C10 version: 98816 • V100R018C00 and later versions: 131072			• V100R017C10 version: 98816 • V100R018C00 and V100R018C10 versions: 131072 • V100R019C00 and later versions: 32768
Switching/Forwarding delay	Short forwarding delay: The 100 Mbit/s Ethernet port sends the 64-byte Ethernet packets at a delay shorter than 20 μ s.			
Bit error rate (BER) in full load	A BER smaller than 10 e-7 for a port that transmits data in full load			
System reliability specifications	System availability for the typical configuration: > 99.999% Mean time between failures (MTBF): about 45 years. * *Due to different network environments and different boards used by devices, the preceding MTBF (45 years) of the MA5800 is only for reference. The average repair time for field replaceable units (FRUs) is about 2 hours. The preceding values are only for reference. For details, contact the related Huawei engineers.			

FEATURES

LAYER 2 FEATURES

- VLAN+MAC forwarding
- SVLAN+CVLAN forwarding
- PPPoE+
- DHCP option82

LAYER 3 FEATURES

- Static route
- RIP/RIPng
- OSPF/OSPFv3
- IS-IS
- BGP/BGP4+
- ARP
- DHCP relay
- VRF

MULTICAST

- IGMP v2/v3
- IGMP proxy/snooping
- MLD v1/v2 (V100R016C10 and later versions)
- MLD Proxy/Snooping (V100R016C10 and later versions)
- VLAN-based IPTV multicast
- IPv4 PIM and PIM-SSM (V100R017C00 and later versions)

QOS

- Traffic classification
- Priority processing
- trTCM-based traffic policing
- WRED
- Traffic shaping
- HCoS
- PQ/WRR/PQ+WRR
- ACL

D-CCAP (V100R016C10 AND LATER VERSIONS)

- DOCSIS 3.1
- RF access and output
- CM management
- Centralized management
- PacketCable
- DOCSIS multicast
- EQAM
- Admission control
- Built-in optical transceiver
- SAV
- PNM
- DSG (V100R018C10 and later versions)

MPLS&PWE3

- MPLS LDP
- MPLS RSVP-TE
- MPLS OAM
- MPLS BGP IP VPN
- Tunnel protection switching
- TDM/ETH PWE3
- PW protection switching

IPV6

- IPv4/IPv6 dual stack
- IPv6 L2 and L3 forwarding
- DHCPv6 relay

VXLAN (V100R018C00 AND LATER VERSIONS)

Virtual eXtensible LAN

ECO-FRIENDLY AND ENERGY-SAVING

In compliance with the Code of Conduct v5 released by the European Commission

SYSTEM RELIABILITY

- GPON type B/type C protection
- 10G GPON type B protection
- BFD (V100R016C10 and later versions)
- ERPS (G.8032)
- MSTP
- Monitor Link (V100R018C10 and later versions)
- Intra-board and inter-board LAG
- In-service software upgrade (ISSU) of the control board
- 2 control boards and 2 power boards for redundancy protection
- In-service board fault detection and rectification
- Service overload control

STANDARDS COMPLIANCE

EMC STANDARDS

IEC 61000-3-2	ETSI ES 201 468
IEC 61000-3-3	ETSI EN 300 386
IEC 61000-4-2	ETSI EN 300 132-2
IEC 61000-4-3	ETSI EN 300 253
IEC 61000-4-4	VCCI V-3
IEC 61000-4-5	EN 55024
IEC 61000-4-6	EN 55032
IEC 61000-4-11	ITU-T K.20
IEC 61000-4-29	CISPR 24
EN 61000-3-2	CISPR 32
EN 61000-3-3	ITU-T K.11
EN 61000-4-2	ITU-T K.20
EN 61000-4-3	ITU-T K.44
EN 61000-4-4	
EN 61000-4-5	
EN 61000-4-6	
EN 61000-4-29	

ENVIRONMENT PROTECTION STANDARDS

2011/65/EU (RoHS)
EN 50581:2012
EC NO. 1907/2006 (REACH)
2012/19/EU (WEEE)

ENVIRONMENT STANDARDS

ETS 300 019 1-1
ETS 300 019 1-2
ETS 300 019 1-3
ETS 300 019 2-1
ETS 300 019 2-2
IEC 60068-2
IEC 60721-2-6
IEC 60721-3-1
IEC 60721-3-2
IEC 60721-3-3
ETSI EN 300 753

SECURITY STANDARDS

EN 60950-1
EN 60825-1
EN 60825-2
IEC 60825-1
IEC 60825-2
IEC 60950-1

RELIABILITY STANDARDS

MIL-HDBK-217F
BELLCORE TR-332/SR-332

PON INTERFACE STANDARDS

ITU-T G.984.1
ITU-T G.984.2
ITU-T G.984.3
ITU-T G.984.4
ITU-T G.987.1
ITU-T G.987.2
ITU-T G.987.3
ITU-T G.988
ITU-T G.9807.1