


SLIM PACK - subscriber connection set*

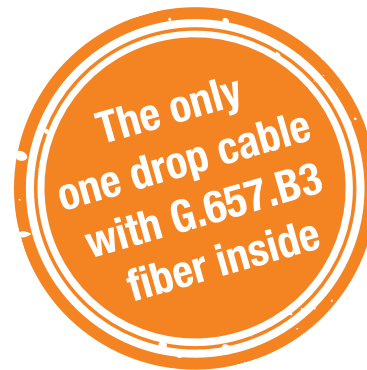

*Length of cable define by customer

FEATURES

- small diameter of a cable
- light
- flexible
- completely dielectric

CABLE'S CONSTRUCTION

- single-fiber
- completely dry
- outer PE coating resistant to UV
- outer diameter 3.1mm

USAGE

- outdoor
- for suspension - self-supporting

TECHNICAL DATA

Parameters	Specification	
Number of fiber	1	
External diameter [mm]	3,1	
Fiber type	ITU-T G.657.B3	
min static/dynamic bending radius [mm]	5mm	
Temperature [°C]	Operation	-30+70
	Installation	-5~50
	Storage	-30+70
Pulling power [N]	1000	

*1% SAG

ORDER

Sample code	Description
N-SLIMPACK-PGT-01-SCA-35	Slim set: Slim pigtail 35m, with connectors SC APC fitted on one side, two Monkey type clamps
N-SLIMPACK-PTCH-01-SCA-35	Slim set: Slim patchcord 35m, with connectors SC APC fitted on both side, two Monkey type clamps