


Optribution® Basic/Advanced L-Band Link DEV 7231 & DEV 7332

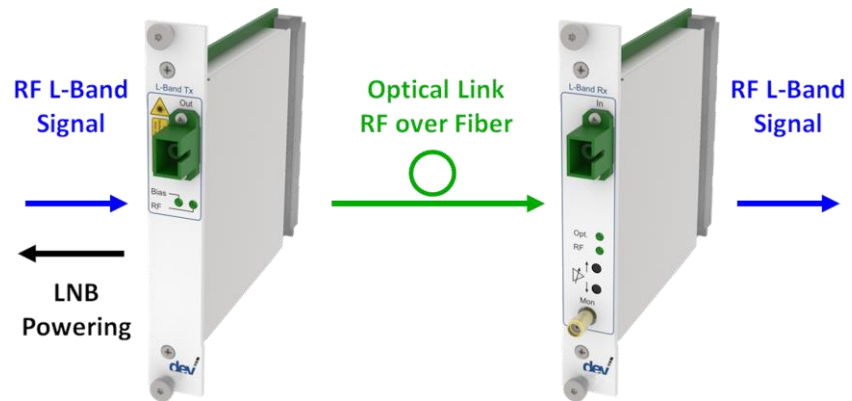

The final product may vary from the above image depending on the options selected.

Products:

- DEV 7231** Basic Optribution® Transmitter; 950...2150 MHz; SC/APC
- DEV 7332** Advanced Optribution® Receiver; 850...2450 MHz; SC/APC; with adjustable Gain

Features:

- Recommended for RF-over-Fiber Links with optical Losses up to 15 dB
- Adjustable Gain
- RF Sensing with Status LED
- LNB Power with Current Monitoring and Status LED
- Push Buttons for Gain Control
- RF Monitor Port
- Optical Connector Type SC/APC (optional FC/APC or E2000 HRL)

Link Specifications DEV 7231 & DEV 7332

	Value	Condition
Frequency Range	950...2150 MHz	
Max. Link Gain	21±2 dB	
Adjustable Gain (Rx Module)	0...16 dB in 1 dB Steps	
Flatness	±1.5 dB ±0.2 dB	950...2150 MHz In any 36 MHz window
Return Loss	>14 dB, typ. 16 dB	
Gain Stability	±2 dB	0...+50 °C / 32...122 °F
Group Delay Distortion	<2 ns	
Nominal RF Input Level	-10 dBm	Total power
Noise Figure	25 dB	
SFDR2/3	106 dBc	Note 1
CNR	58 dB	Notes 2, 3, 4
Output IP3	16 dBm	
OP1dB	11 dBm	
Intermodulation Distortion	>40 dBc	@ 2 tones, -13 dBm each
Input Power dynamic Range	-60...-6 dBm	Total power
Damage RF Input Level	12 dBm	Total power
Maximum allowable optical Losses	23 dB	

Note 1: $P_{in} = -15$ dBm, IM3 = 44 dBc

Note 2: $P_{in} = -15$ dBm

Note 3: 36 MHz window

Note 4: with back to back fiber connection (2 m) and minimum noise figure

Technical Data DEV 7231 & DEV 7332

	Value	Condition
Common Optical Specifications		
Fiber Type	Single Mode 9/125 μ m	
Optical Connector	SC/APC, E2000/HRL, or FC/APC	Standard is SC/APC
Tx Specifications (DEV 7231)		
Laser Type	DFB	
Laser Class (according to IEC 60 825-1)	Class 1M (low Risk to Eyes, no Risk to Skin)	
Optical Power Output	1 mW / 0 dBm	
Power Consumption	15 V; 200 mA	Without LNB power
Weight	~0.5 kg	
Tx LNB Power & Current Monitoring		
LNB Power	18+0/-3 V; max. 500 mA	
Alarm Indication	Via LED on the Front Panel & via Remote Communication	
Rx Specifications (DEV 7332)		
Wavelength Range	1100...1650 nm	
Min. optical Input Level (optical Sensitivity)	-22 dBm	
Damage optical Input Level	+10 dBm	
Power Consumption	15 V; 250 mA	
Weight	~0.3 kg	
Rx Monitor Port		
Impedance, Connector	50 Ohm, SMA (f)	
Return Loss	>18 dB typ.	
Insertion Loss / Flatness Monitor Port	= Output Level – 20 $\pm$ 1 dB	
Tx & Rx RF Sensing		
Adjustable Threshold Level (THL)	0 dBm > THL > -50 dBm	
Threshold Level Accuracy	$\pm$ 3 dB	
Threshold Repeatability	<0.5 dB	
Alarm Indication	Via LED on the Front Panel & via Remote Communication	
Tx & Rx General Specification		
Size	4 HP (20 mm) Width, 3 RU (133 mm) Height, 3.94" (100 mm) Depth	
Environmental Conditions	ETS 300019 Part 1-3 Class 3.1E	

Order Information

Products	
DEV 7231	Basic Optribution® Transmitter; 950...2150 MHz; SC/APC
DEV 7332	Advanced Optribution® Receiver; 850...2450 MHz; SC/APC; with adjustable Gain

Optical Connector Options	
Option 07	FC/APC Optical Connector
Option 08	E2000/HRL Optical Connector

Contact

DEV Systemtechnik GmbH
Grüner Weg 4A
61169 Friedberg
GERMANY
Phone: +49 6031 6975 100
Fax: +49 6031 6975 114
info@dev-systemtechnik.com
www.dev-systemtechnik.com

Rev. 21-Feb-2018

Technical specifications are subject to change