

VECTOR BOOSTRAL 7920

1.2 GHZ SEGMENTABLE OPTICAL NODE 2X4


- 1.2 GHz Technology
- 200 MHz Technology
- GaN Technology
- Electronic control
- VMC (VECTOR Mobile Commander)
- Electronic adjustment
- NMS transponder
- VIG (VECTOR Ingress Guard)
- Integration of optical passives
- GREEN mode



SPECIFICATIONS

FORWARD PARAMETERS	
Wavelength	1260 - 1620 nm
Bandwidth	85...258 - 1218 MHz
Optical input power range	- 9.9 - 2 dBm
Optical AGC range	- 7 - 0 dBm
Flatness	± 0.5 dB
Equivalent Input Noise Current	5 pA / √Hz
Output level:	
CTB ≤ - 60 dBc	2 x 117 dBμV
CSO ≤ - 60 dBc	2 x 119 dBμV
Umax	2 x 112 dBμV
Gain limited output level	2 x 119 dBμV
Number of outputs	2 active, up to 4 with passive splitting
RETURN PARAMETERS	
Bandwidth	5 - 65 ... 204 MHz
Flatness	± 0.5 dB
Optical output power	3 or 6 dBm ± 0.5 dB
Min RF input level to get 10% OMI	70 dBμV
NPR / Dynamic range	40 dB / 5 dB
OTHERS	
Return loss	> 18 dB
AC voltage range: remote powering	30 - 65 V AC
Max. current for RF / AC IN ports	10 / 15 A
Power consumption	< 54 W
Operation temperature range	- 40 - 60 °C
Optical connectors	SC / APC
RF connectors	4 x PG11
Protection class	IP 67
Dimensions (W x L x H)	255 x 234 x 128 mm
Weight	< 4.0 kg

BLOCK DIAGRAM

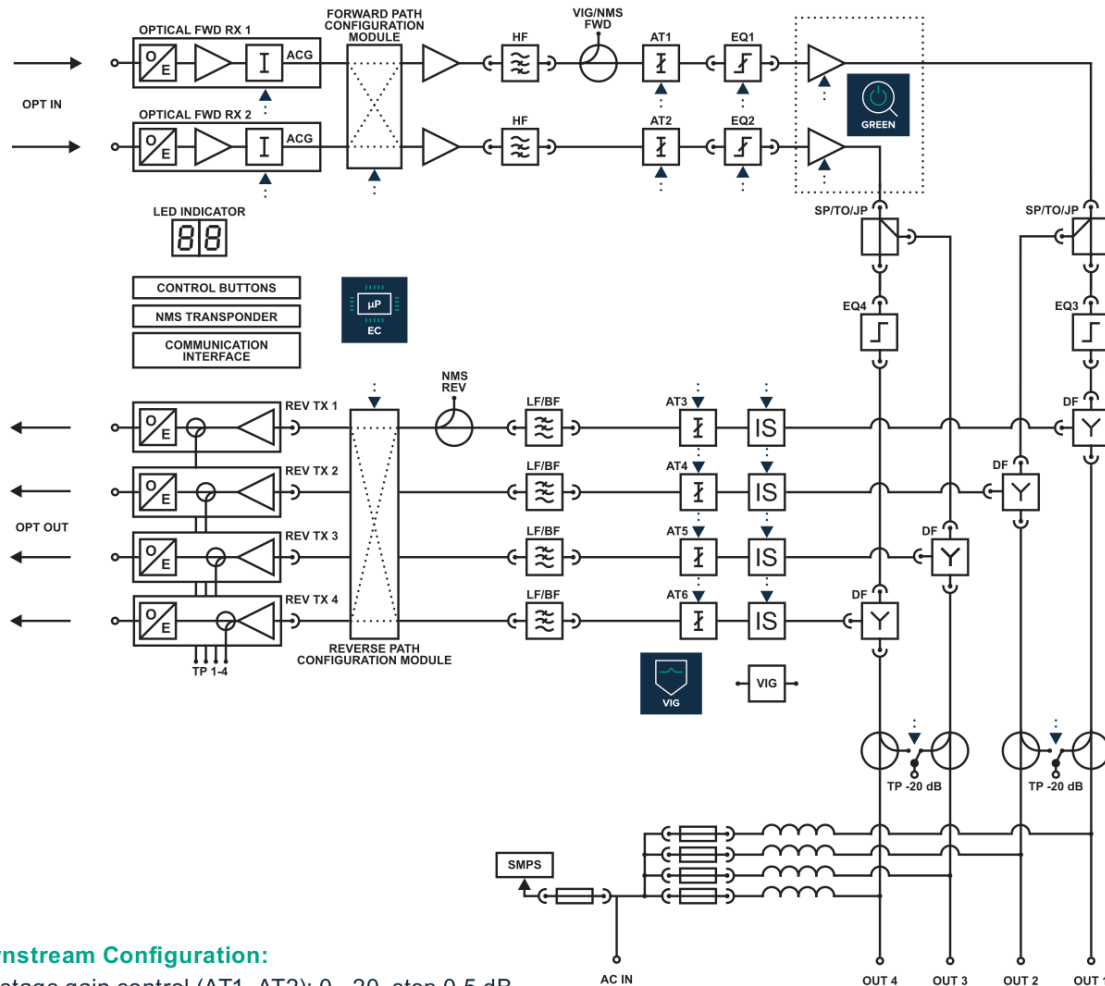

Downstream Configuration:

Interstage gain control (AT1, AT2): 0 - 20, step 0.5 dB

Interstage slope control (EQ1, EQ2): 0 - 20, step 0.5 dB

Output (Bridge ports) slope control (EQ3, EQ4): 0 - 20, step 1.0 dB

Upstream Configuration:

Input gain control (AT3, AT4, AT5, AT6): 0 - 20, step 0.5 dB

Ingress switches: 0, -6, -∞ dB

ORDERING INFORMATION

AVAILABLE VERSIONS	
BOOSTRAL 7920 489Y	remote powering; max. config: 2Rx x 4Tx